



www.icmcorp.net

The F81 is our Universal "F" type barrel adapter that fits all "F" type connectors.



Specifications:

- 75 Ohm Construction
- DC-1 GHz > 28 dB Return Loss < 1.09 VSWR
- DC-2 GHz > 21 dB Return Loss < 1.23 VSWR
- DC-3 GHz > 22 dB Return Loss < 1.25 VSWR
- Cable Pullout Force Exceeding N/A in/lbs.
- Body Material Brass
- Body Material (Plating) Nickel

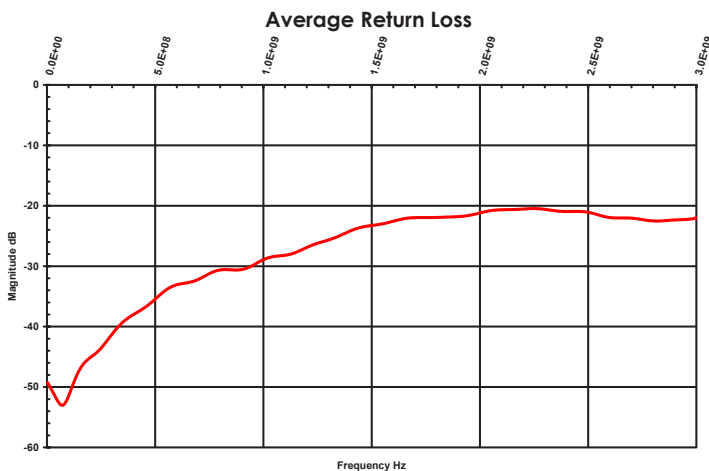

Frequency (Hz)	dB
5 MHz	-50.4 dB
15 MHz	-51.8 dB
550 MHz	-34.1 dB
750 MHz	-31.9 dB
1000 MHz	-28.6 dB
2000 MHz	-21.7 dB
3000 MHz	-22.1 dB

Lower return loss (dB) equates to less reflection through the connector while maintaining signal strength