


www.icmcorp.net

The FS1BNC is our Mini "BNC" type connector that fits most brands of 24-26AWG coaxial cable.

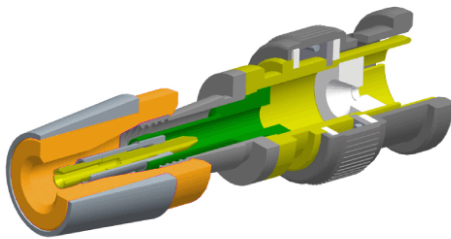


Specifications:

- 75 Ohm Construction
- DC-1 GHz > 23 dB Return Loss < 1.16 VSWR
- DC-2 GHz > 20 dB Return Loss < 1.20 VSWR
- DC-3 GHz > 20 dB Return Loss < 1.20 VSWR
- Cable Pullout Force Exceeding 50 in/lbs.
- Body Material Brass
- Body Material (Plating) Nickel
- Center Contact Brass
- Center Contact (Plating) Gold

Coax Sizing (inches)	Min	~	Max
Center	.015	~	.025
Dielectric	.065	~	.078
Outer Jacket	.095	~	.110

Coax Sizing (mm)	Min	~	Max
Center	.38	~	.64
Dielectric	1.65	~	1.98
Outer Jacket	2.41	~	2.79

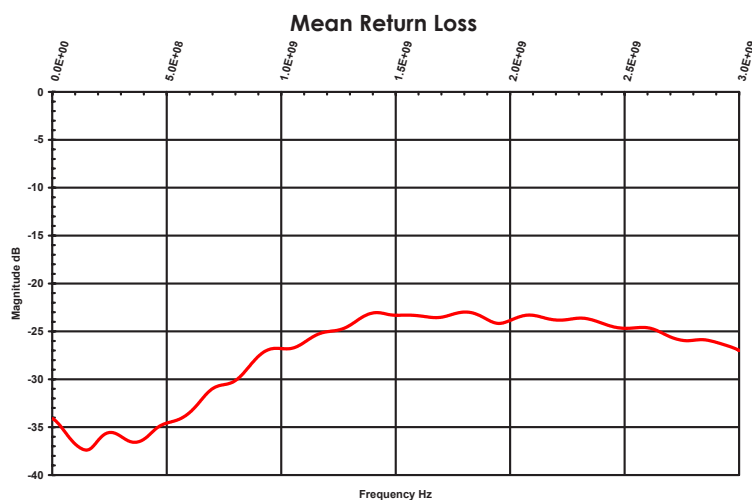

Frequency (Hz)	dB
5 MHz	-34.2 dB
15 MHz	-34.3 dB
550 MHz	-34.2 dB
750 MHz	-30.6 dB
1000 MHz	-26.8 dB
2000 MHz	-23.9 dB
3000 Mhz	-27.1 dB

Lower return loss (dB) equates to less reflection through the connector while maintaining signal strength